



SOD-123FL Plastic-Encapsulate Diodes


ESDSMF24CA Bi-direction Transient Voltage Suppressor

DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, high level of ESD protection makes them a flexible solution for applications such as Digital cameras, cellular phones, and MP3 Players. It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

SOD-123FL



FEATURES

- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 24V
- Low reverse clamping voltage
- Low leakage current
- Excellent package: 2.80mm × 1.90mm × 1.10mm
- Peak pulse power: 300W (10/1000μs)
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection
- Surge protection according to 10/1000μs waveform: I_{PPM} 8A

APPLICATIONS

- Computers and peripherals
- Digital Cameras
- Audio and video equipment
- Cellular handsets and accessories
- Portable electronics
- Other electronics equipments communication systems

MARKING



Front side

XXXX = Internal Code

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
IEC 61000-4-2 ESD Voltage	$V_{\text{ESD}}^{(1)}$	± 30	kV
Air Model			
Contact Model		± 30	
JESD22-A114-B ESD Voltage		± 20	
ESD Voltage	Machine Model	± 0.4	
Peak Pulse Power	$P_{\text{PP}}^{(2)}$	300	W
Peak Pulse Current	$I_{\text{PP}}^{(2)}$	8	A
Lead Solder Temperature – Maximum (10 Second Duration)	T_L	260	$^{\circ}\text{C}$
Operation Junction and Storage Temperature Range	T_J, T_{stg}	$-55 \sim +150$	$^{\circ}\text{C}$

(1).Device stressed with ten non-repetitive ESD pulses.


(2).Non-repetitive current pulse 10/1000 μs waveform

ESD standards compliance**IEC61000-4-2 Standard**

Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard


ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

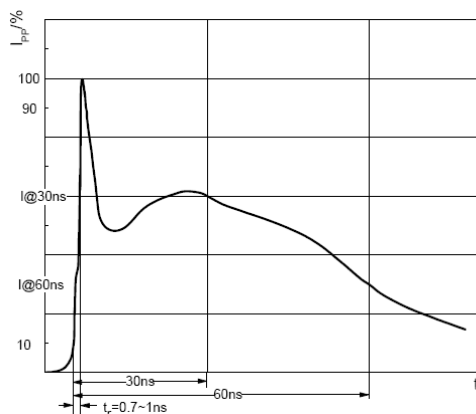

ESD pulse waveform according to IEC61000-4-2

ELECTRICAL PARAMETER



Symbol	Parameter
V_{CL}	Clamping Voltage @ IPP
I_{PP}	Peak Pulse Current
V_{TRIG}	Reverse trigger voltage
I_{TRIG}	Reverse trigger current
V_{BR}	Reverse breakdown Voltage
I_{BR}	Reverse breakdown current
V_{RWM}	Reverse Standoff Voltage
I_R	Reverse Leakage Current @ VRWM
V_{HOLD}	Reverse Holding Voltage
I_{HOLD}	Reverse Holding Current

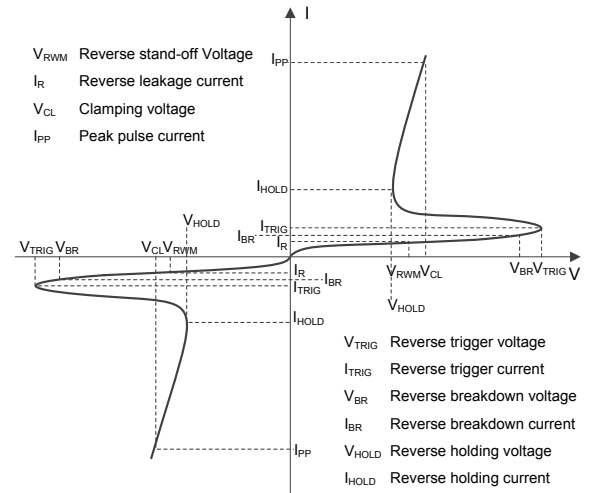**V-I characteristics for a Bi-direction TVS****ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	V_{RWM}				24	V
Reverse leakage current	I_R	$V_{RWM}=12\text{V}$			1	μA
Breakdown voltage	$V_{(BR)}$	$I_T=1\text{mA}$	26.7		32	V
Clamping voltage	$V_C^{(1)}$	$I_{PP}=8\text{A}$			39	V
Junction capacitance	C_J	$V_R=0\text{V}, f=1\text{MHz}$			350	pF


(1).Non-repetitive current pulse 10/1000 μs waveform

TYPICAL CHARACTERISTICS

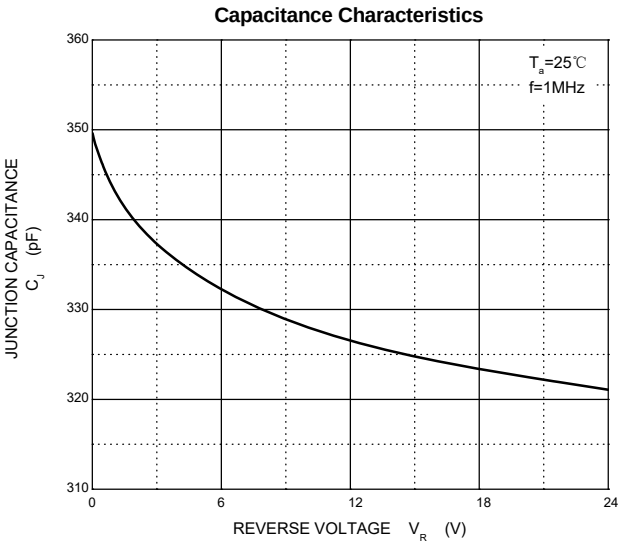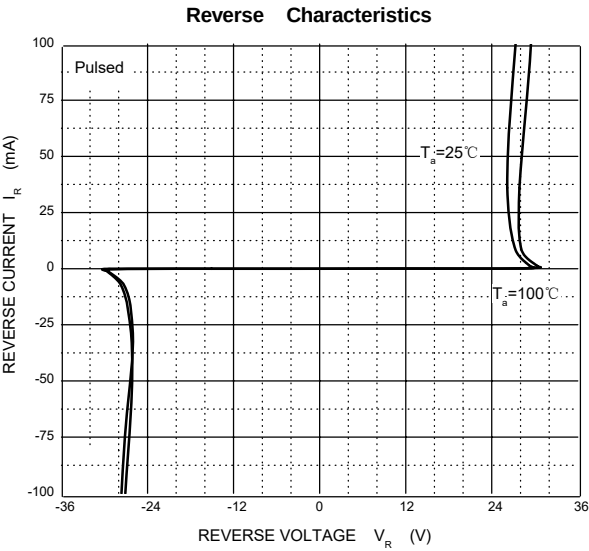


PACKAGE OUTLINE AND PAD LAYOUT INFORMATION

SOD-123FL Package Outline Dimensions

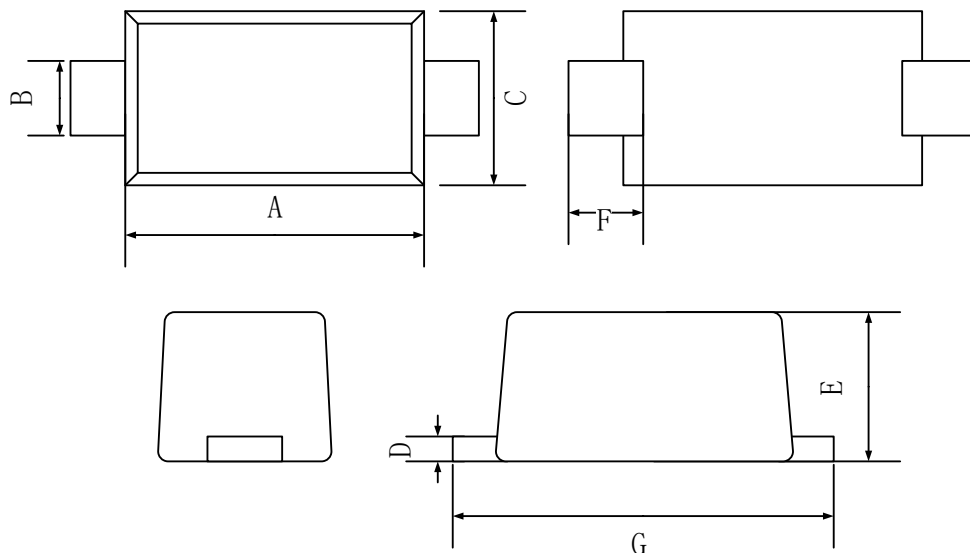

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	2.50	3.00
B	0.70	1.20
C	1.50	2.10
D	0.05	0.30
E	0.90	1.40
F	0.30	0.95
G	3.40	4.00

SOD-123FL Suggested Pad Layout

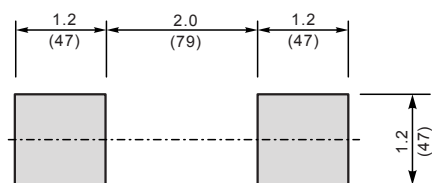

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.