



DFN1610-2L Plastic-Encapsulate Diodes

ESDBT4V5FD1 Bi-direction Transient Voltage Suppressor


DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, high level of ESD protection makes them a flexible solution for applications such as Digital cameras,cellular phones.

It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

DFN1610-2L




FEATURES

- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 4.5V
- Low reverse clamping voltage
- Low leakage current
- Excellent package:1.60mm×1.00mm×0.58mm
- Peak pulse power: 1610W (IEC61000-4-5 8/20μs)
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection
- Surge protection according to IEC61000-4-5 8/20μs waveform: I_{PPM} 140A

APPLICATIONS

- Computers and peripherals
- Power lines
- Audio and video equipment
- Cellular handsets and accessories
- Portable electronics
- Tablets
- Other electronics equipments communication systems

MARKING



Front side

4.5F = Device code

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
IEC 61000-4-2 ESD Voltage	$V_{\text{ESD}}^{(1)}$	± 30	kV
Air Model			
Contact Model		± 30	
JESD22-A114-B ESD Voltage		± 20	
ESD Voltage	Machine Model	± 0.4	
Peak Pulse Power	$P_{\text{PP}}^{(2)}$	1610	W
Peak Pulse Current	$I_{\text{PP}}^{(2)}$	140	A
Lead Solder Temperature – Maximum (10 Second Duration)	T_L	260	$^{\circ}\text{C}$
Operation Junction and Storage Temperature Range	T_J, T_{stg}	$-55 \sim +150$	$^{\circ}\text{C}$

(1).Device stressed with ten non-repetitive ESD pulses.


(2).Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.

ESD standards compliance**IEC61000-4-2 Standard**


Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard


ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

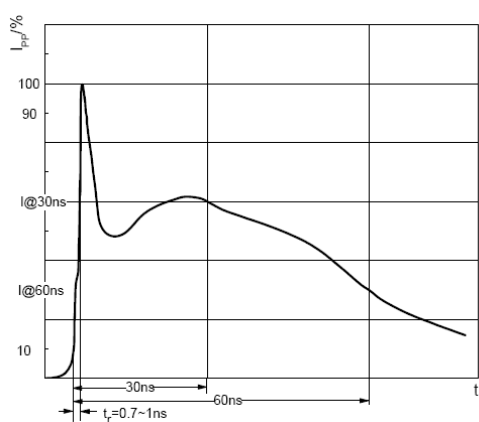

ESD pulse waveform according to IEC61000-4-2

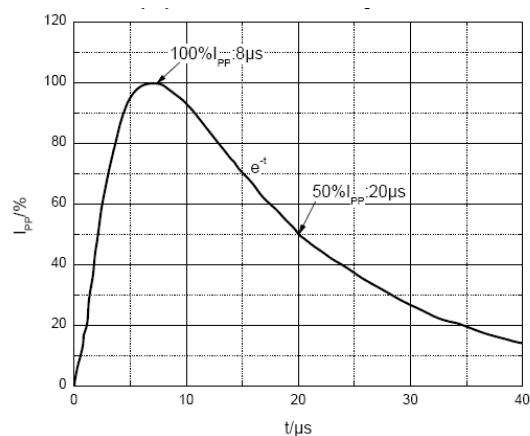8/20 μs pulse waveform according to IEC 61000-4-5

ELECTRICAL PARAMETER

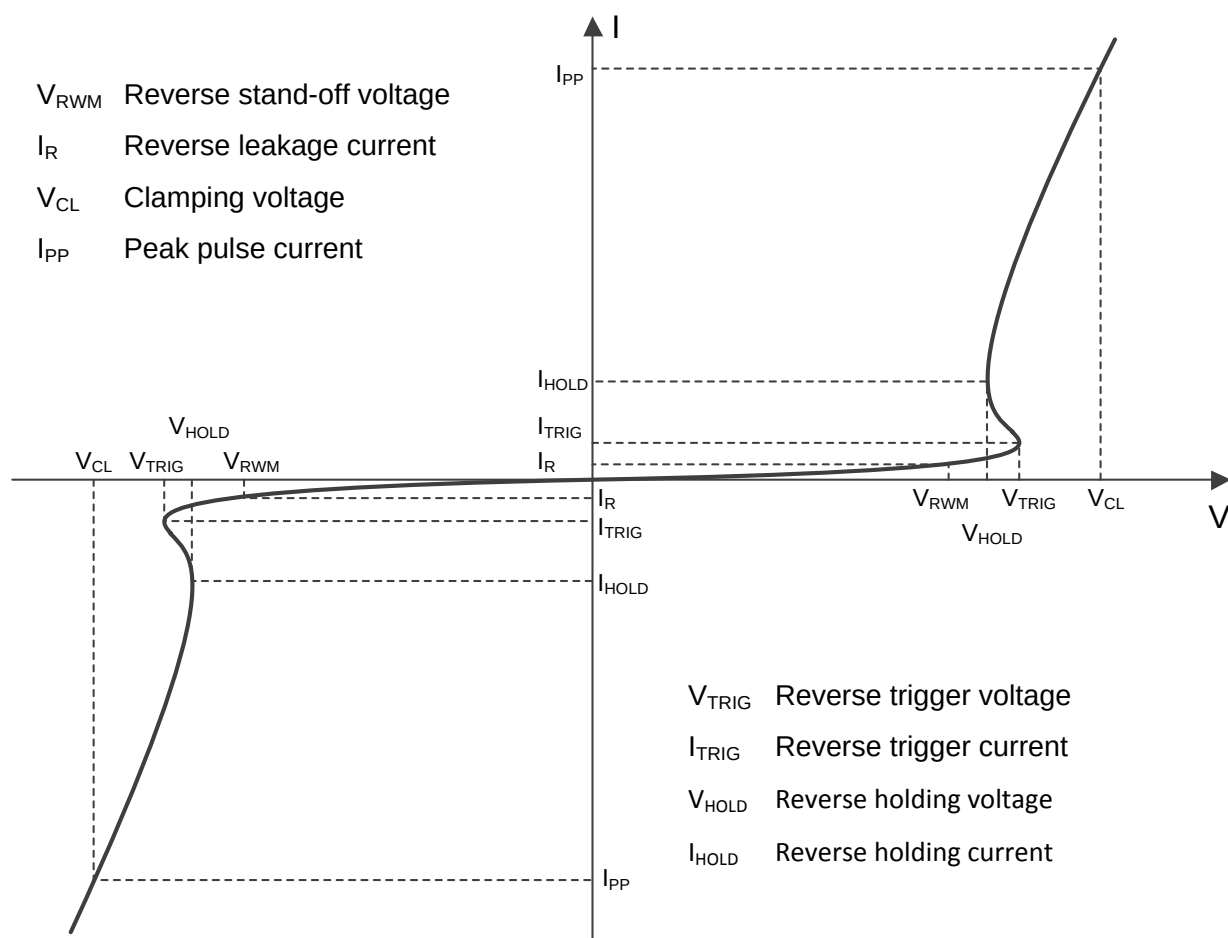 V_{RWM} Reverse stand-off voltage I_R Reverse leakage current V_{CL} Clamping voltage I_{PP} Peak pulse current V_{TRIG} Reverse trigger voltage I_{TRIG} Reverse trigger current V_{HOLD} Reverse holding voltage I_{HOLD} Reverse holding currentELECTRICAL CHARACTERISTICS($T_a=25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	$V_{RWM}^{(1)}$				4.5	V
Reverse leakage current	I_R	$V_{RWM}=4.5\text{ V}$			1	μA
Reverse trigger voltage	V_{TRIG}	$I_T=1\text{mA}$	5.0			V
Reverse holding voltage	V_{HOLD}	$I_T=100\text{mA}$	4.6			V
Clamping voltage	$V_C^{(2)}$	$I_{PP}=120\text{A}$			11.5	V
Junction capacitance	C_J	$V_R=0\text{V}, f=1\text{MHz}$			360	pF

(1).Other voltages available upon request.



(2).Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5


TYPICAL CHARACTERISTICS

Reverse Characteristics

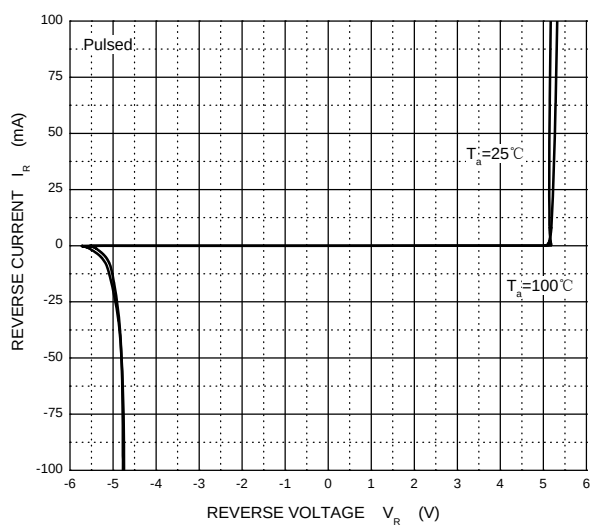


Capacitance Characteristics

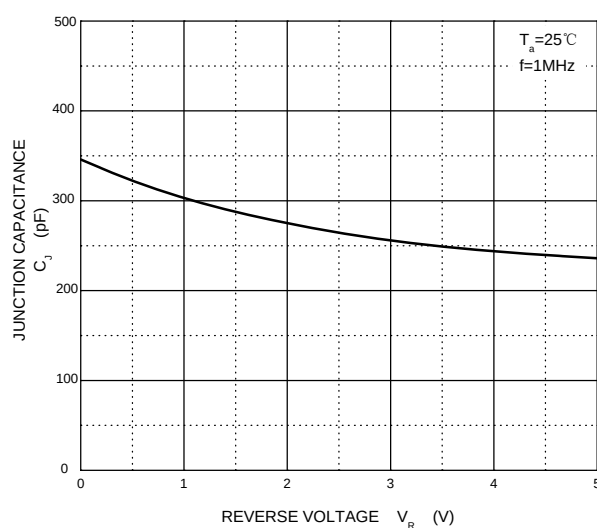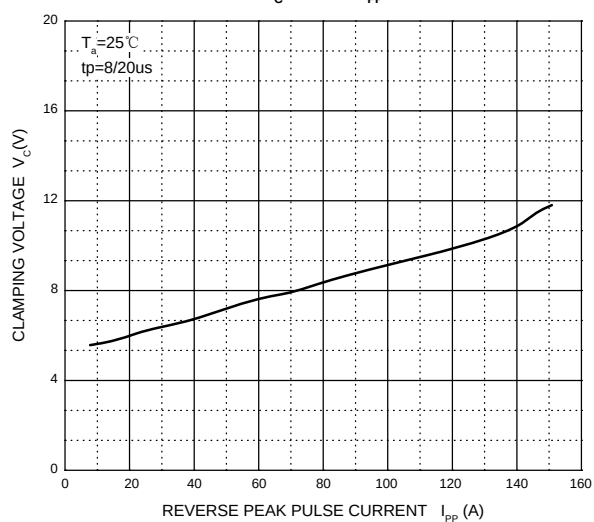 V_C — I_{PP} 

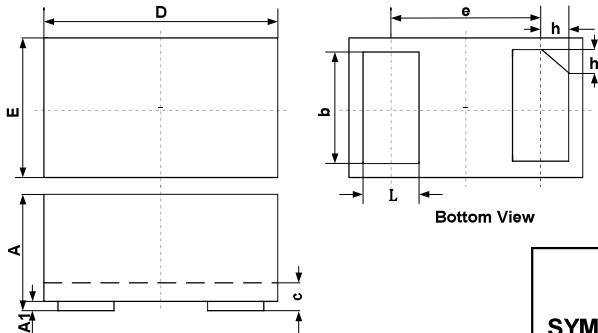PACKAGE OUTLINE AND PAD LAYOUT INFORMATION**DFNWB1610-2L Package Outline Drawing**

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.75	0.80	0.85	0.030	0.032	0.034
c	0.10	0.15	0.20	0.004	0.006	0.008
D	1.55	1.60	1.65	0.062	0.064	0.066
e	1.10 BSC			0.044 BSC		
E	0.95	1.00	1.05	0.038	0.040	0.042
L	0.35	0.40	0.45	0.014	0.016	0.018
h	0.15	0.20	0.25	0.006	0.008	0.010

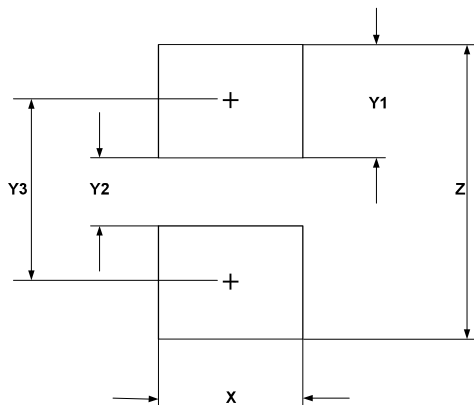Suggested Land Pattern


SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	1.00	0.040
Y1	0.62	0.025
Y2	0.60	0.024
Y3	1.22	0.049
Z	1.85	0.074

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.


TAPE AND REEL INFORMATION

DFN1610 (1.6×1.0×0.5) Embossed Carrier Tape

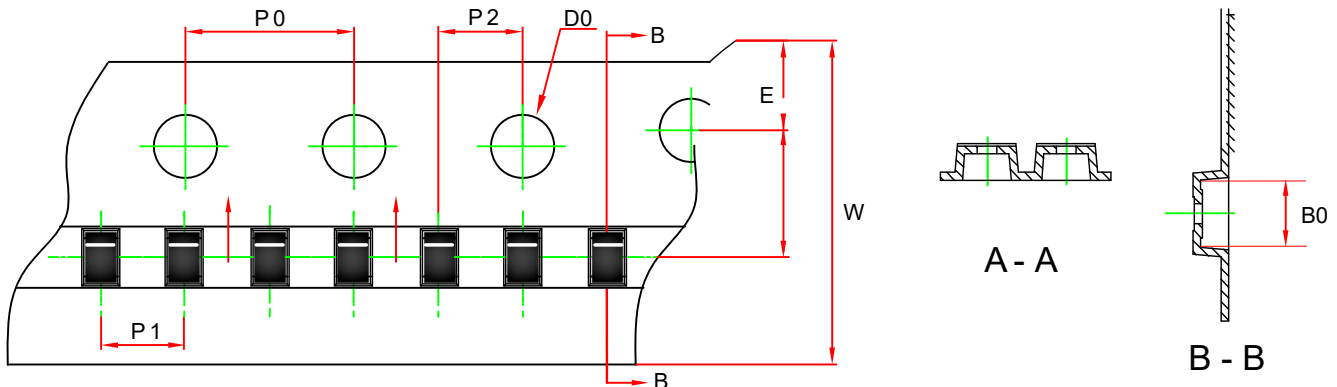


Dimensions In Millimeters (mm)								
Pkg type	B0	P0	P1	P2	E	F	W	D0
DFN1.6×1.0	1.72	4.00	2.00	2.00	1.75	3.50	8.00	1.50
Tolerance	+/-0.05	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.3	+/-0.1

DFN1610 (1.6×1.0×0.5) Tape Leader and Trailer

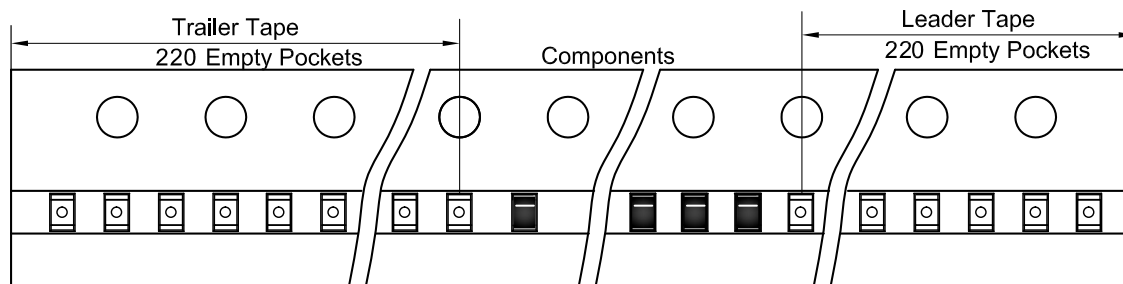

DFN1610 (1.6×1.0×0.5) Reel

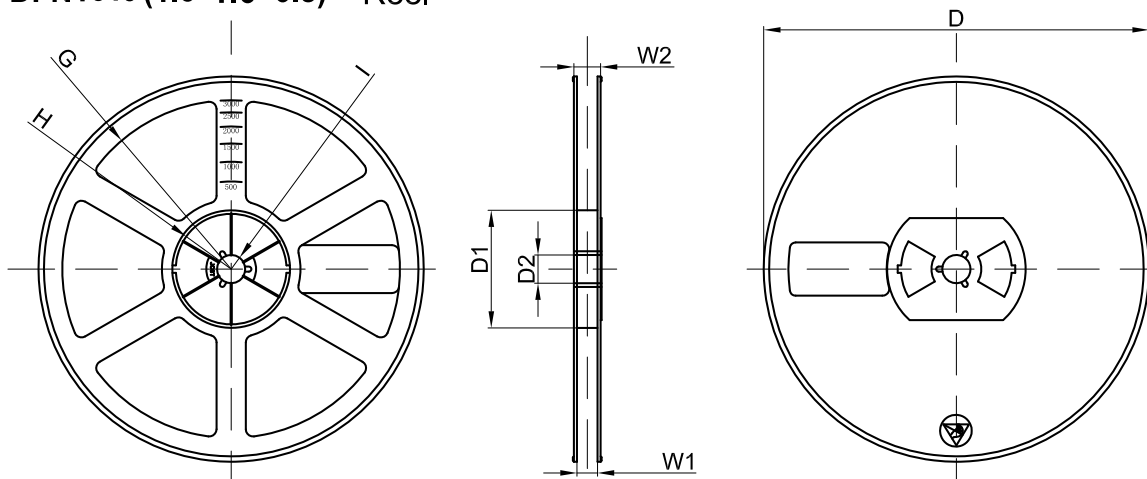

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
10000 pcs	7 inch	150,000 pcs	203×203×195	600,000 pcs	438×438×220	