



JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD

## JSCJ DFNWB0.6×0.3-2L Plastic-Encapsulate Diodes

### ESDBU6V0AE1 Bi-direction ESD Protection Diode

#### DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

#### FEATURES

- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 6 V
- Low reverse clamping voltage
- Low leakage current
- Excellent package: 0.6mm×0.3mm×0.31mm
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection

#### APPLICATIONS

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories
- 10 Mbit/s Ethernet
- Portable electronics
- FireWire
- Other electronics equipments communication systems


#### MARKING



Front side

S=Device code

The marking bar indicates the cathode

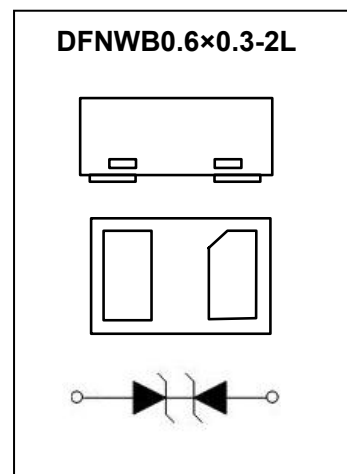

**MAXIMUM RATINGS (  $T_a=25^{\circ}\text{C}$  unless otherwise noted )**

| Parameter                                              | Symbol                 | Limit           | Unit               |
|--------------------------------------------------------|------------------------|-----------------|--------------------|
| IEC 61000-4-2 ESD Voltage                              | $V_{\text{ESD}}^{(1)}$ | $\pm 15$        | kV                 |
| Air Model                                              |                        |                 |                    |
| Contact Model                                          |                        | $\pm 15$        |                    |
| JESD22-A114-B ESD Voltage                              |                        | $\pm 20$        |                    |
| ESD Voltage                                            | Machine Model          | $\pm 0.4$       |                    |
| Peak Pulse Power                                       | $P_{\text{PP}}^{(2)}$  | 45              | W                  |
| Peak Pulse Current                                     | $I_{\text{PP}}^{(2)}$  | 4               | A                  |
| Lead Solder Temperature – Maximum (10 Second Duration) | $T_L$                  | 260             | $^{\circ}\text{C}$ |
| Operation Junction and Storage Temperature Range       | $T_J, T_{\text{stg}}$  | $-55 \sim +150$ | $^{\circ}\text{C}$ |

(1).Device stressed with ten non-repetitive ESD pulses.


(2).Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5.

**ESD standards compliance****IEC61000-4-2 Standard**


| Contact Discharge |                 | Air Discharge |                 |
|-------------------|-----------------|---------------|-----------------|
| Level             | Test Voltage kV | Level         | Test Voltage kV |
| 1                 | 2               | 1             | 2               |
| 2                 | 4               | 2             | 4               |
| 3                 | 6               | 3             | 8               |
| 4                 | 8               | 4             | 15              |

**JESD22-A114-B Standard**

| ESD Class | Human Body Discharge V |
|-----------|------------------------|
| 0         | 0~249                  |
| 1A        | 250~499                |
| 1B        | 500~999                |
| 1C        | 1000~1999              |
| 2         | 2000~3999              |
| 3A        | 4000~7999              |
| 3B        | 8000~15999             |

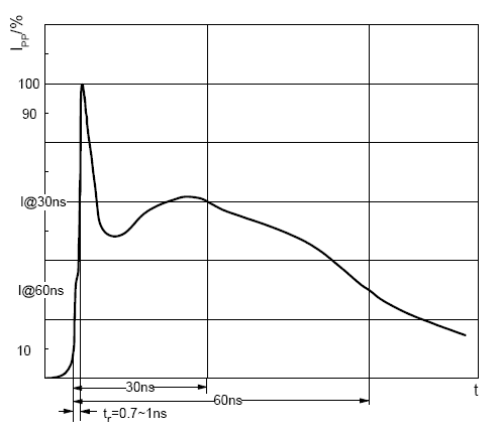


ESD pulse waveform according to IEC61000-4-2

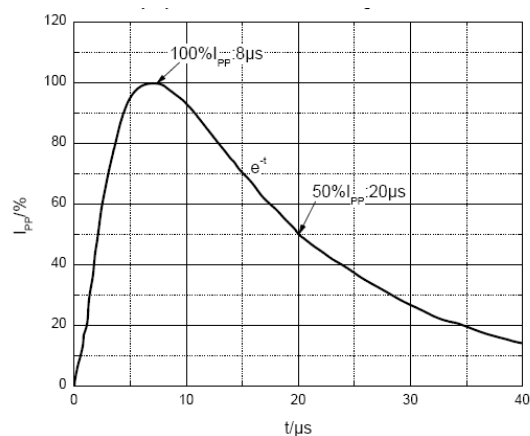8/20 $\mu\text{s}$  pulse waveform according to IEC 61000-4-5

ELECTRICAL PARAMETER

| Symbol           | Parameter                                  |
|------------------|--------------------------------------------|
| V <sub>C</sub>   | Clamping Voltage @ I <sub>PP</sub>         |
| I <sub>PP</sub>  | Peak Pulse Current                         |
| V <sub>BR</sub>  | Breakdown Voltage @ I <sub>BR</sub>        |
| I <sub>BR</sub>  | Test Current                               |
| I <sub>R</sub>   | Reverse Leakage Current @ V <sub>RWM</sub> |
| V <sub>RWM</sub> | Reverse Standoff Voltage                   |

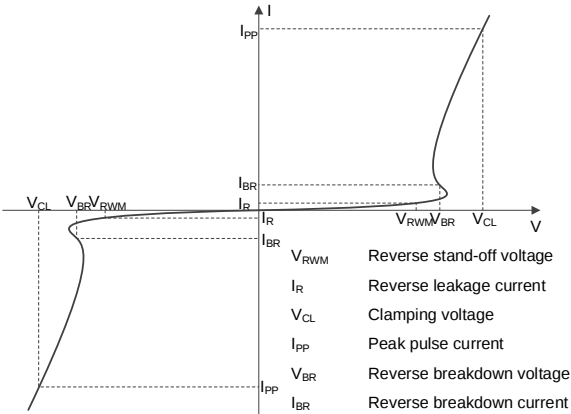


ELECTRICAL CHARACTERISTICS(T<sub>a</sub>=25°C unless otherwise specified)

| Parameter                 | Symbol                          | Test conditions           | Min | Typ  | Max | Unit |
|---------------------------|---------------------------------|---------------------------|-----|------|-----|------|
| Reverse stand off voltage | V <sub>RWM</sub> <sup>(1)</sup> |                           |     |      | 6.0 | V    |
| Reverse leakage current   | I <sub>R</sub>                  | V <sub>RWM</sub> =6V      |     |      | 0.1 | uA   |
| Breakdown voltage         | V <sub>(BR)</sub>               | I <sub>T</sub> =1mA       | 6.7 | 8.3  |     | V    |
| Clamping voltage          | V <sub>C</sub> <sup>(2)</sup>   | I <sub>PP</sub> =4A       |     |      | 12  | V    |
| Junction capacitance      | C <sub>J</sub>                  | V <sub>R</sub> =0V,f=1MHz |     | 0.45 | 0.5 | pF   |


- (1).Other voltages available upon request.
- (2).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5

TYPICAL CHARACTERISTICS


Reverse Characteristics

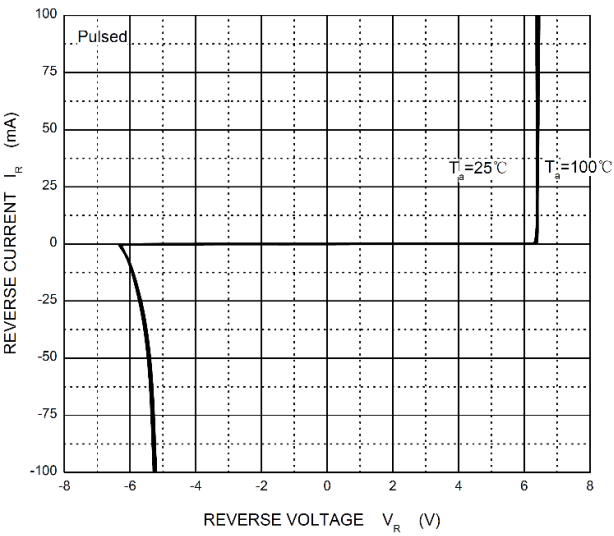

Capacitance Characteristics


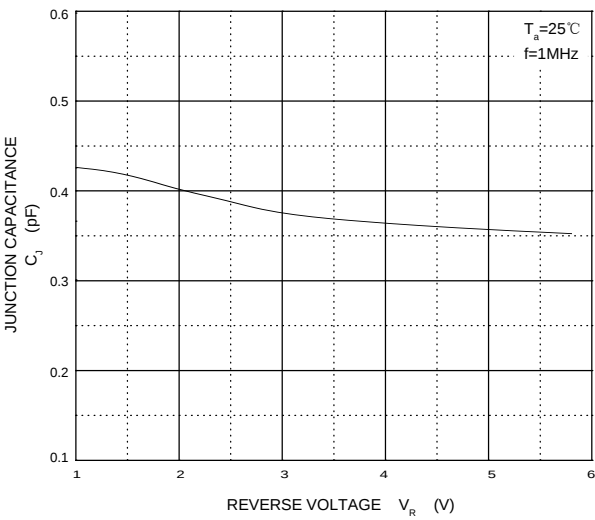


$V_C$  ----  $I_{PP}$

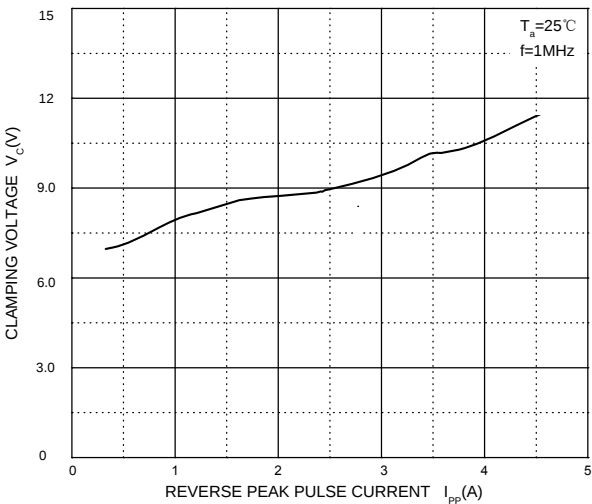


## PACKAGE OUTLINE AND PAD LAYOUT INFORMATION

## DFNWB0.6×0.3-2L Package Outline Dimensions

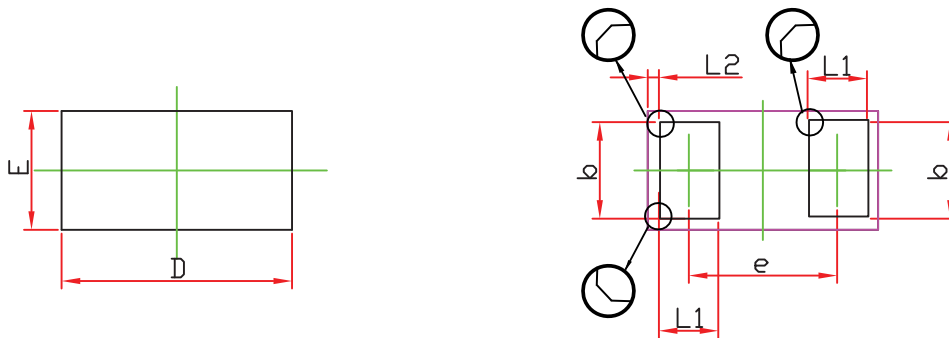

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 0.270                     | 0.340 | 0.010                | 0.013 |
| D      | 0.550                     | 0.670 | 0.021                | 0.026 |
| E      | 0.250                     | 0.370 | 0.009                | 0.015 |
| b      | 0.200                     | 0.350 | 0.008                | 0.014 |
| c      | 0.050 REF.                |       | 0.002 REF.           |       |
| e      | 0.350                     | 0.435 | 0.014                | 0.017 |
| L1     | 0.125                     | 0.230 | 0.005                | 0.009 |
| L2     | 0.030 REF.                |       | 0.001 REF.           |       |

## DFNWB0.6×0.3-2L Suggested Pad Layout

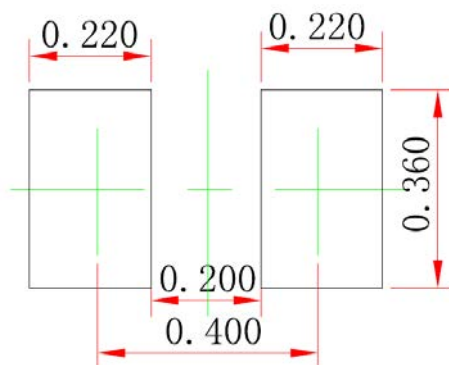**Note:**



1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.050\text{mm}$ .
3. The pad layout is for reference purposes only.

**NOTICE**

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

## TAPE AND REEL INFORMATION

## DFNWB0.6x0.3-2L Embossed Carrier Tape

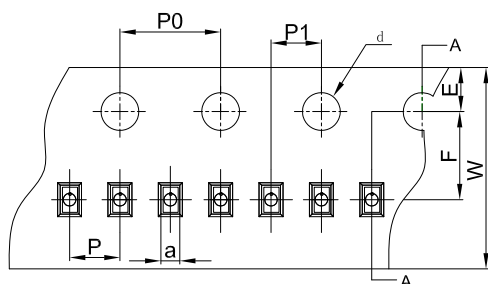

A-A


## Packaging Description:

DFNWB0.6x0.3-2L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 10,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Note: If it is the product of the same polarity, the cathode line should be removed.

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |      |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | a    | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| DFNWB0.6x0.3-2L-B            | 0.41 | 0.70 | 0.38 | Ø1.50 | 1.75 | 3.50 | 4.00 | 2.00 | 2.00 | 8.00 |

## DFNWB0.6x0.3-2L Tape Leader and Trailer

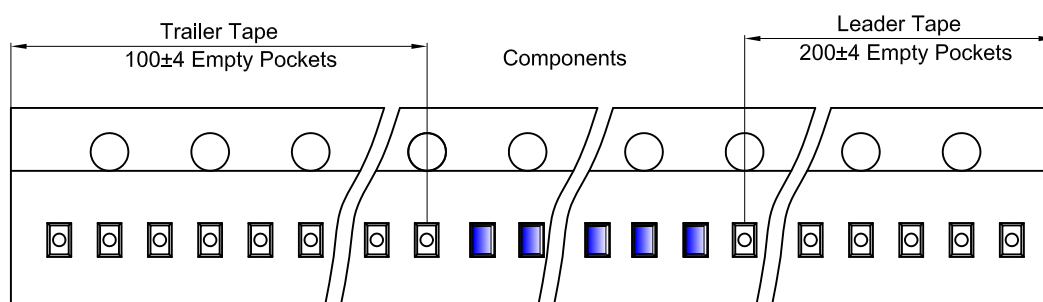

## DFNWB0.6x0.3-2L Reel

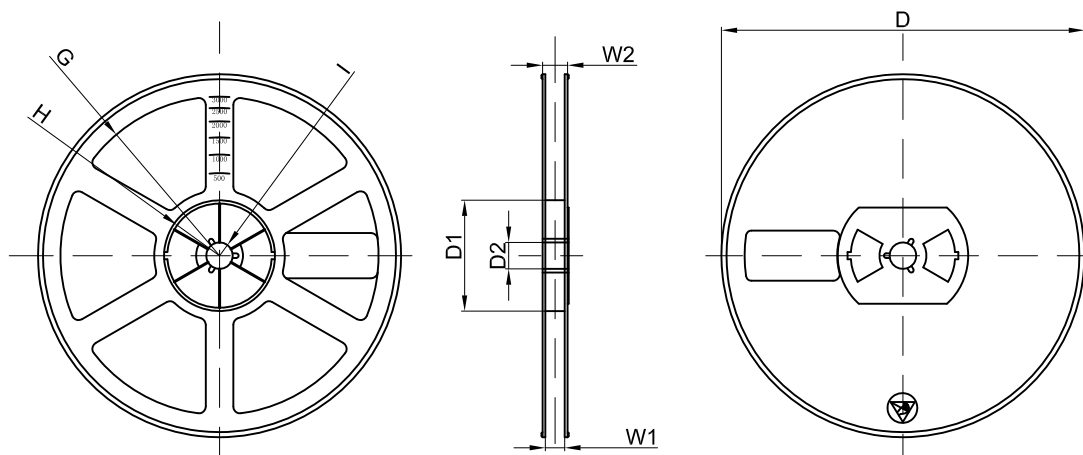

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL       | Reel Size | Box         | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|------------|-----------|-------------|--------------|-------------|-----------------|----------|
| 10,000 pcs | 7 inch    | 150,000 pcs | 203×203×195  | 600,000 pcs | 438×438×220     |          |